


Power cable < 1 kV, for flexible applications EQ-flex CC-JB

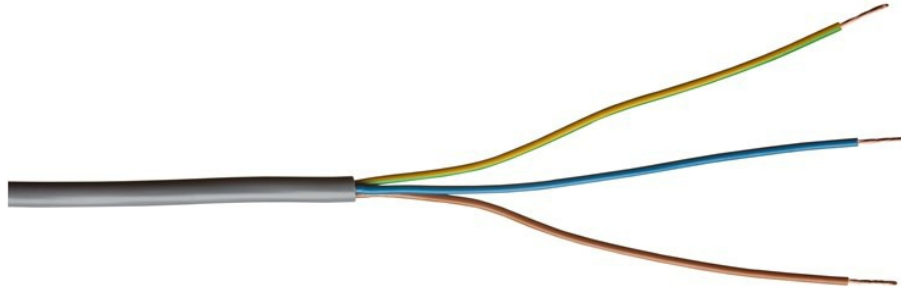

Application : For flexible use in industrial environments, machine manufacturing, process control systems.

TECHNICAL DATA : TYPE CC-JB

Remarks : Oil resistant according to EN 50290-2-22 (TM54).

| | |
|----------------------------------------------------------------------|-----------------------------------|
| Conductor material | : Copper, bare |
| Conductor category | : Class 5 = flexible |
| Stranding element | : No |
| Core insulation material | : Polyvinyl chloride (PVC) |
| Protective conductor | : Yes |
| Core identification | : Colour |
| Suspension element | : None |
| Inner sheath | : No |
| Screen over stranding element | : None |
| Screen | : No |
| Model | : Round |
| Screen over stranding | : None |
| Flame retardant | : In accordance with EN 60332-1-2 |
| Material outer sheath | : Polyvinyl chloride (PVC) |
| Colour outer sheath | : Grey |
| Halogen free (acc. EN 60754-1/2) | : No |
| Oil resistant (acc. EN 60811-404) | : Yes |
| Low smoke (acc. BS EN 61034-2) | : No |
| Low temperature resistant (acc. EN 60811-504+505+506) | : No |
| Permitted cable outer temperature during assembling/handling | : -5°C to 70°C |
| Permitted cable outer temperature after assembling without vibration | : -30°C to 70°C |
| Max. conductor temperature | : 70°C |
| Nominal voltage U ₀ | : 500V |
| Core protecton | : No |
| Nominal voltage U | : 500V |
| Reaction-to-fire class according to EN 13501-6 | : Eca |
| Conductor surface | : Bare |
| Specification core insulation | : Other |
| | : No |
| Specification material outer sheath | : Other |
| | : Round |
| Shape of conductor | : Round |



JOBARCO



JOBARCO

| ProductNr | Dimension | Outer diameter approx. (mm) |
|------------------|------------------|--------------------------------------------|
| 1004320 | 4 x 0.5 | 5.7 |
| 1004315 | 3 x 0.75 | 5.7 |
| 1015404 | 4 x 0.75 | 6.2 |
| 1004302 | 5 x 0.75 | 6.8 |
| 1004306 | 3 x 1 | 6.1 |
| 1004310 | 5 x 1 | 7.6 |
| 1004313 | 3 x 1.5 | 6.9 |
| 1004307 | 4 x 1.5 | 7.5 |
| 1004311 | 5 x 1.5 | 8.4 |
| 1004319 | 3 x 2.5 | 8.5 |